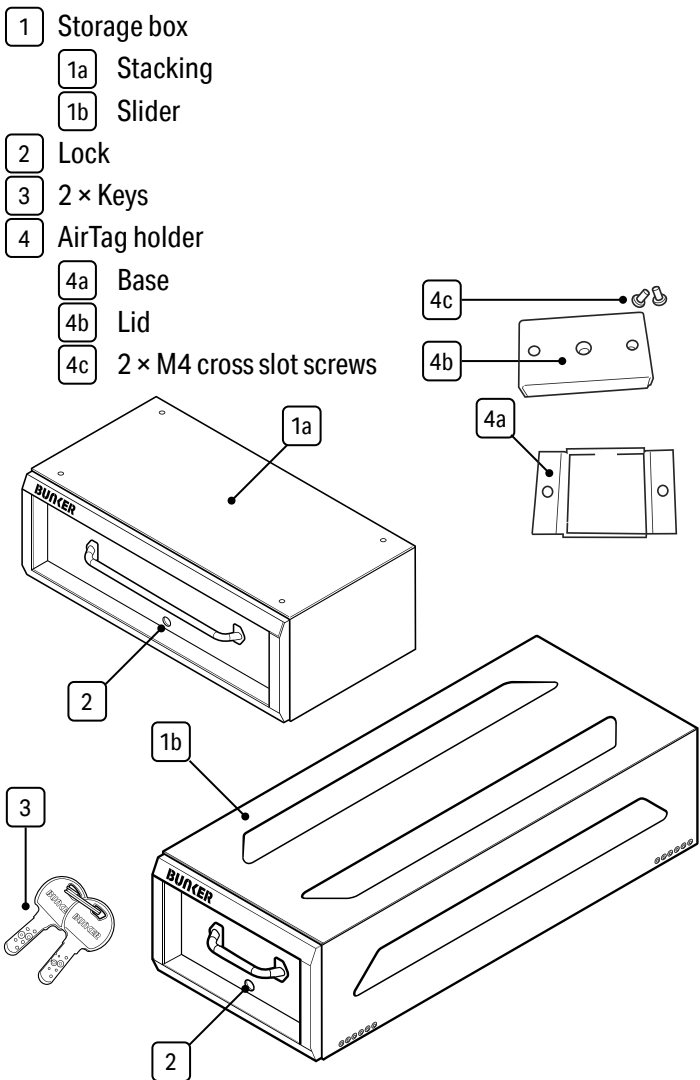


Health and Safety Information

- Important:** Read all the Health and Safety instructions before attempting to use or maintain this product. Failure to follow these instructions may result in injury or damage to the user, the product or the vehicle where installed.
- Important:** Before installing into a vehicle ensure that you consult and follow your vehicle handbook, or the instructions of your vehicle manufacturer/local dealership, locate the appropriate fitting point(s)/method of fitting for this product.
 - DO NOT** exceed the max weight capacity stated.
 - This product is heavy – 2 persons required for moving and installation.
 - Ensure the box is correctly installed and secured to the base of your vehicle using the fixings supplied. The integrity of the box is dependent on the box being correctly installed.

Product Overview






Installing the Storage Box In A Vehicle

- We **DO NOT** accept any liability or responsibility for any damage to, or effects on, a vehicle caused by incorrect installation or the selection of unsuitable fixings.
- To fit your Bunker storage product to a vehicle use the pre-drilled fixings points and the fixings supplied. Secure the box through the floor of the vehicle.






Vehicle Installation Fixings supplied – 07135/07136

Item	Qty
Hex Head Bolt M10 × 40mm	4
M10 Shear Nut	4
M10 Washer	4
Hex Head Self Tapping Screw M10 × 30mm To fix box to wooden panel.	4
M10 Sealing Washer Replace standard M10 washer to protect against water ingress.	4

Vehicle Installation Fixings supplied – 07135/07136

Item		Qty
L-Bracket Fixings		4
Hex Head Bolt M6 × 12mm		8
M6 Washer		8

Vehicle Installation Fixings supplied – 07134/07137

Item		Qty
Hex Head Bolt M10 × 20mm		4
M10 Shear Nut		4
M10 Washer		4
Hex Head Self Tapping Screw M10 × 30mm To fix box to wooden panel.		4
M10 Sealing Washer Replace standard M10 washer to protect against water ingress.		4

Fitting the AirTag Holder

- If required the AirTag holder can be fitted to the underside of the drawer.
- Align the base **4a** with the predrilled holes (⊕) on the underside of the drawer. Insert the required AirTag (not supplied) or similar tracker.
- Attach lid **4b** with screws **4c** supplied.

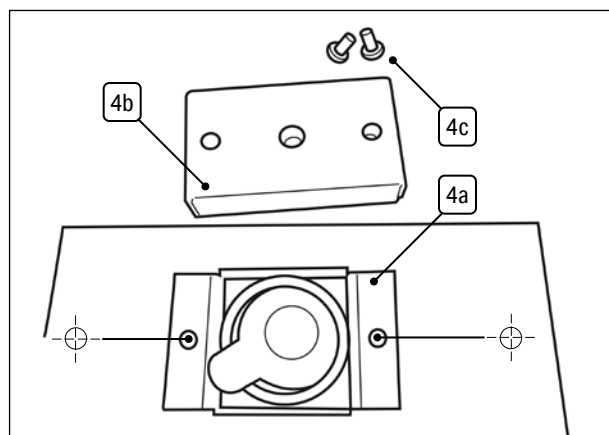


Fig. 1

Maintenance and Disposal

Lock Mechanism Maintenance

- Due to the harsh environments the box is used in, it is recommended that regular maintenance is performed on the lock to keep it in working order.
- Inspect and clean the lock every 3 – 6 months. For ease it is best to remove the lock when cleaning.

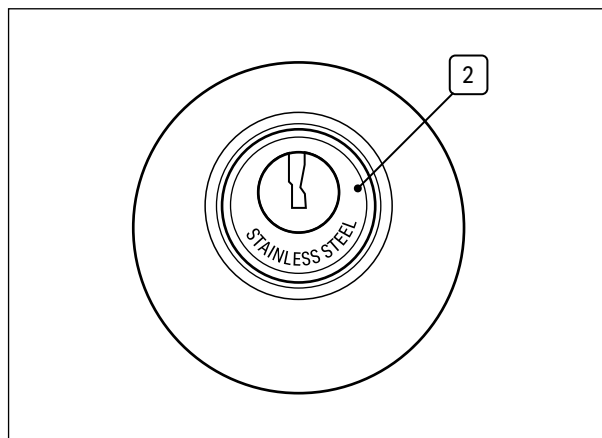


Fig. 2

- To remove the lock **2**:
 - Open the lid and unscrew the M6 nuts from the internal lock housing.
 - Remove the disc lock – note the lock orientation.
 - Locate the keyhole and holes on the back of the disc lock. Blow out any dust and dirt from the lock.
 - Lubricate lightly using a lubricant spray with PTFE additives.
 - Insert the key and open and close the lock multiple times to check the lock works freely.
 - Reattach to the box.

At the end of its working life, dispose of the product responsibly and in line with local regulations. Recycle where possible.

Warranty

10 years from date of purchase -

Visit bunkerstorage.com/warranty for full details.

To obtain replacement keys – Visit bunkerstorage.com

Contact Details

bunkerstorage.com

EU: Oude Graaf 8, 6002 NL, Weert, Netherlands

UK: Hursley Road, Chandler's Ford,
Eastleigh, Hampshire SO53 1YF