



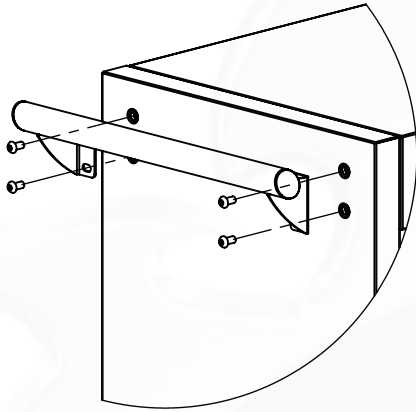


To make assembly easier we recommend having two persons aid one another.

1. ATTACH SIDE HANDLE

- Position the trolley side handle over the holes on the trolley.
- Attach with (4) M8 x 20mm bolts and tighten with hex key (not supplied).

Note: the side handle only fits to left side of the trolley.

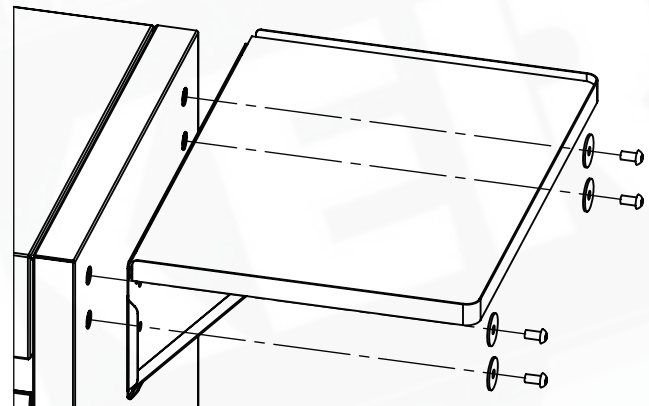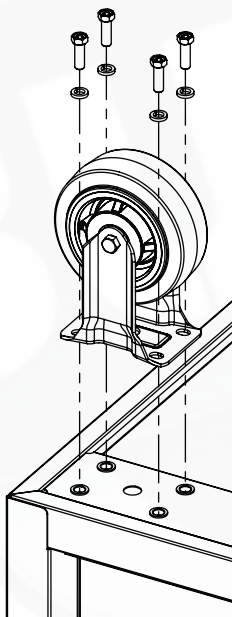

2. ATTACH FOLDING HANGING TRAY

- Position the folding hanging tray over the holes on the trolley.
- Attach with (4) M8 x 20mm bolts and 32 x 8.5 x 2mm flat washers and tighten with hex key (not supplied).

Note: the folding hanging tray only fits to right side of the trolley.


3. ATTACH CASTORS

- Be sure the drawers are locked and lay the trolley on its side.
- Secure castors to the unit using (4) M8 x 25mm bolts and 14 x 8.8 x 2.6mm spring washers provided.
- Tighten with hex key.
- Repeat this process for the castors on the opposite of the trolley
- Return the trolley to its upright position.

Note: Do not fully tighten.

REMOVING AND REPLACING THE DRAWERS:

- Pull the drawer completely out.
- Press down on the left tab and lift up the right tab.
- Pull drawer off sliders.
- To reinstall the drawer, realign with the internal slider and push in until locked in place.

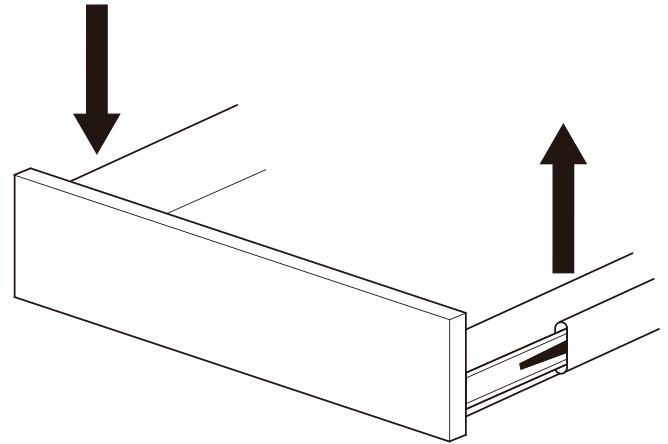

CASTOR MAINTENANCE

Grease the castors annually using high quality bearing grease

CARE AND CLEANING

Periodically the surfaces should be cleaned with a mild detergent and water. Grease and oil can be removed with most standard cleaning fluids. For safety use a non-flammable cleaning fluid.

Auto wax will preserve the unit's lustre finish and protects against scratches.