

AUGUST 2026

TOOL
CONNECTION

newlines


EXCLUSIVE LATEST PRODUCT PREVIEW

LASER®

Connect®
Workshop Consumables


POWER
TEC

Gunson®

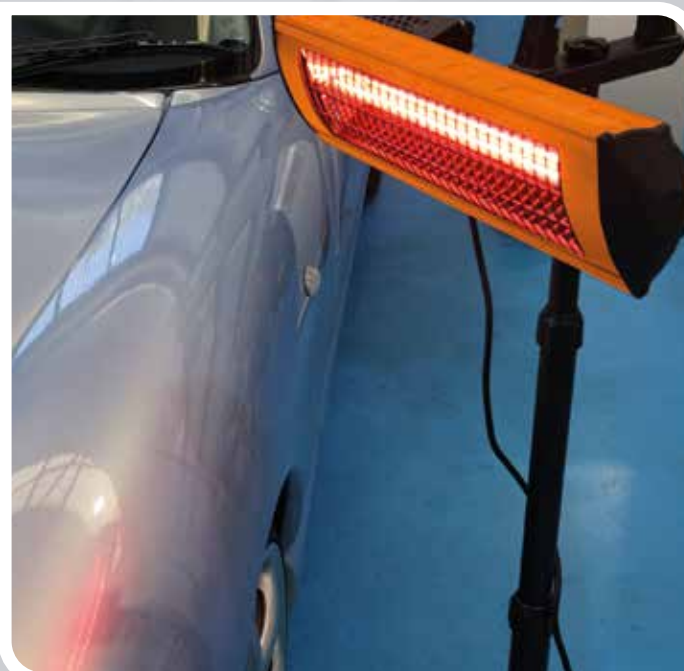

View the latest **new** problem-solving and game-changing tools added to our catalogue!

Our ever expanding product range can be viewed at lasertools.co.uk



SCAN OR CLICK HERE

TO SEE MORE OF OUR GREAT NEW TOOLS IN THE RANGE

LASER

Truck Axle Thread Corrector M75 x 1.5mm Left & Right-Hand Thread

PART NO. 9393

Two pairs of thread-correcting dies designed to repair damaged threads on truck axles. Includes one right-hand threaded pair and one left-hand threaded pair. Simply mount the dies in the supplied frame on an undamaged section of the thread, then wind back to restore the damaged area. Lubricate with suitable cutting oil. Manufactured from high carbon alloy steel, with a carbon steel frame.

Applications include: MAN & SAF axles with M75 R/H & L/H threads.

- Always ensure the cutting teeth of the tool are kept well lubricated with grease or oil.
- UK Patent Pending.

NOTE: Ensure correct pair are selected and assemble the dies on the good part of the thread to ensure the repaired thread is not crossed.

PATENT PENDING



VIEW ONLINE

DriveDock – Magnetic Hand Tool Holders 3pc

PART NO. 9406

A uniquely designed way to hang 1/2", 3/8" and 1/4" drive breaker bars, power bars, ratchets and T-braces on the side of toolboxes or ramps. It can also be used to hang pry bars on lift posts or toolboxes. The design allows the bracket to be used vertically or horizontally, including for storing tools in toolbox drawers.

- For convenient hanging storage. Utilises strong N52 Neodymium magnets with anti-slip rubber pads to ensure it remains secure on ferrous surfaces yet removable when required.
- Provided with central screw hole for non-ferrous surfaces.
- Can be used either way up or even inside a toolbox drawer as a tool tidy for ratchets etc.
- Manufactured from strong durable PA6 nylon. Ideal for use with Laser Tools power bars and ratchets.



VIEW ONLINE

SCAN OR CLICK HERE
TO WATCH VIDEO

LASER

As featured on

LASER
Live

LASER®

**Digital 5.5mm Diameter
Endoscope for Android,
Mac & iPhone (iOS)****PART NO. 9411**

Designed to work with Apple iPhone, Android phones as well as Mac operating systems, the Laser 9411 endoscope inspection camera is a simple to use plug-and-play adaptor that allows the user to record still images and video. The extra-long 5m camera cable provides access to almost any area while keeping the phone at a safe distance. The semi-rigid camera cable can be shaped as required so the user can guide the camera around corners.

- Camera: High-resolution (1,000,000 pixels) with 70° camera viewing angle. Photo formats: JPG (1280x720) Video: MP4/AVI (640x480). Also features a built-in adjustable 6-LED torch.
- Focal length: 20 – 100mm, frame rate 25 FPS. 5.5mm diameter camera, 5m long. Supplied with detachable hook, 45° mirror & magnet pick-up.
- Supply voltage (from Phone) DC 5V, operating temperature range 0-45°.

5.5mm
DiameterSCAN OR CLICK HERE
TO WATCH VIDEO

VIEW ONLINE

LASER®

**Suspension Bush Removal
& Fitting Kit for Tesla****PART NO. 9429**

Designed to remove and fit the rear suspension hub rose joints (ball joints) on the Tesla Model 3 and Model Y without removing the suspension arms or hubs from the vehicle. The tool is designed for in situ use. PLEASE NOTE: Due to the close tolerances of the bushes in the hub, alignment of the 9429 is critical to prevent damage to the tool or hub. Ensure the hub is cleaned and well illuminated to ensure correct alignment.

Applications include: Tesla Model 3 & Model Y, rear top & bottom rose joints 2017 to 2023.

- 2 joints per rear hub. OEM Joints 1043964-00-C, 1044416-00-F, 1027426-00-A, 1044411-00-F & 1027426-00-C etc.
- For best results use with 2x 19mm ratchet spanners.
- Equivalent to OEM 2130203-00-A (PLEASE NOTE: Tesla state the joints should only be replaced once. After this the whole hub should be replaced).

NOTE: Please ensure instructions are followed – check our website for the latest instruction. Always lubricate the force screw with molybdenum disulphide grease before use.

SCAN OR CLICK HERE
TO WATCH VIDEO

VIEW ONLINE



EXCLUSIVE LATEST PRODUCT PREVIEW



LASER

Windscreen Chip Repair Kit & Curing Torch

PART NO. 9431

A windscreen chip can turn into a much larger crack at any time. As well as weakening the screen, it can also result in an MOT failure. If the damage is in the driver's line of vision, it only needs to be larger than 10mm for the windscreen to fail the MOT test. Windscreen replacement insurance excesses can be costly, and many insurers now charge an excess even for chip repairs. Quickly and easily inject a UV curable resin which, once cured, bonds to the glass and dries clear.

- For all types of laminated windscreen. Use with UV lamp supplied.
- Minimises the appearance of chips and cracks in windscreens and stops them spreading.
- Kit includes: Cleaning cloth, 2.5g of resin, one-piece repair tower, a syringe style applicator, razor blade, UV torch on stand with holding sucker, 5x curing cover films.



VIEW ONLINE



LASER

Pinion Shaft Socket 27 Spline for BMW Differential

PART NO. 9437

1/2"D input shaft socket specifically for BMW differential input (pinion) shaft with 27 splines.


Applications include: BMW 2 Series (2012 - 2018), 3 Series (2011 - 2018), 4 Series (2013 - 2019), 4 Series Cabriolet (2013 - 2018), M2 (2012 - 2018), M3 (2011 - 2018) & M4 (2013 - 2019). 1/2"D with 27 splines. Use with Part No. 9027 (final drive prop-shaft tool set).

- Equivalent to OEM 83 30 2 456 244. For use with differentials fitted with limited slip.
- Manufactured from carbon steel (S45C).
- For 34 spline input shafts please see Laser Part No. 8469.



VIEW ONLINE



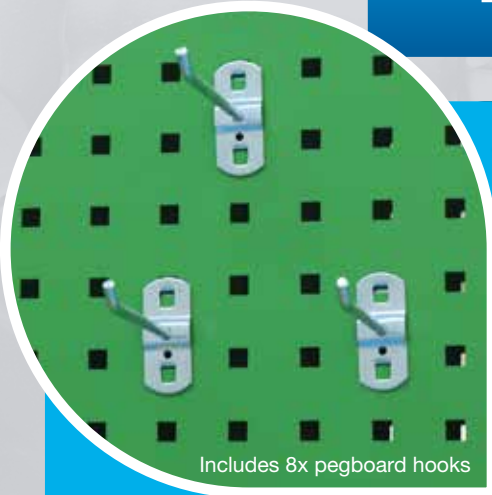

Includes 8x pegboard hooks



Multi-Purpose Storage Cart

PART NO. 9470

A large parts cart combining a substantial steel basket with a centrally positioned steel pegboard for added stability. Equally suited for storing EV safety equipment, general tools, or vehicle parts.

- Overall size: 1200 x 590 x 2030mm. Maximum load capacity (SWL): 60kg (basket) & 20kg (peg board).
- Basket size: 1200 x 590 x 480mm. Peg board size: 1200 x 800mm.
- Features a solid steel base with steel mesh bottom bin and centralised steel peg board (hanging board).
- Fitted with 4x substantial 100mm swivel castor wheels for easy manoeuvrability (2 with brake).



VIEW ONLINE



EXCLUSIVE LATEST PRODUCT PREVIEW



Tripod
height range
640 - 1520mm

Infra-Red Paint Drying Lamp 1kW

PART NO. 92777

A mains-powered, paint-drying lamp mounted on a folding tripod, featuring an integral handle for easy manoeuvrability. Ideal for small to medium-sized areas, it comes with a single quartz halogen bulb and a built-in timer of up to 30 minutes.

- Temperature range: 40°-100°C; power: 1050W (single bulb 1000W per lamp short wave).
- Baking area: 0.5 x 0.6m. Height adjustment: 640-1520mm.

Ideal for small area spot repairs, adhesive strip removal, drying filler or primer, or pre-heating prior to spraying.

- Folding tri-pod for easy storage.
- Input supply: 230V. Cable length: 3.6m, fitted with a 3 pin BS plug.

Spare bulbs available – Part No. 63140.

For larger areas see infra-red drying lamps, Part Nos. 92476 & 92442.



VIEW ONLINE



LASER
TOOLS

DON'T MISS OUT SIGN UP TODAY

Sign up to our newsletter for your chance to win exclusive **Laser Tools** products, merchandise and VIP experiences.



Newest
product releases



Latest
Videos



Digital access to
our latest magazines



TOP QUALITY
PRODUCTS



EXCLUSIVE
PRIZES



VIP EXPERIENCES
& MORE

**SCAN
TO ENTER**



**TOOL
CONNECTION**

To view full product details and more visit:

toolconnection.co.uk

The Tool Connection shall not be held responsible for any errata, or subsequent technical changes or modifications to products described in this publication.