



# Ø180MM VARIABLE SPEED SANDER/POLISHER

1400W

MODEL NO: MS925PS.V2

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

**IMPORTANT:** PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to  
instruction  
manual



Wear a  
mask



Wear  
eye  
protection



Wear  
ear  
protection



Wear  
protective  
gloves

## 1. SAFETY

### 1.1. ELECTRICAL SAFETY

- ☐ **WARNING!** It is the user's responsibility to check the following:
- ✓ Check all electrical equipment and appliances to ensure that they are safe before using.
- ✓ Inspect power supply leads, plugs and all electrical connections for wear and damage.
- ✓ Ensure that the insulation on all cables and on the appliance is safe before connecting it to the power supply.
- ✗ **DO NOT** use worn or damaged cables, plugs or connectors.
- ✓ Ensure that any faulty item is repaired or replaced immediately by a Sealey qualified technician.
- ✓ If the cable or plug is damaged during use, switch off the electricity supply and remove from use.
- ✓ Sealey recommend that an RCD (Residual Current Device) is used with all electrical products.
- Important:** Ensure that the voltage rating on the appliance suits the mains power supply.
- ✗ **DO NOT** pull or carry the appliance by the power cable.
- ✗ **DO NOT** pull the plug from the socket by the cable.

### 1.2. GENERAL SAFETY

- ☐ **WARNING!** *Ensure Health & Safety, local authority, and general workshop practice regulations are adhered to when using this equipment.*
- ✓ Familiarise yourself with the application and limitations of the product, as well as the specific potential hazards peculiar to the polisher.
- ☐ **WARNING!** Disconnect from the mains power and ensure the disc is at a complete standstill before changing accessories, servicing or performing any maintenance.
- ✓ Maintain the polisher/sander in good condition (use an authorised service agent).
- ✓ Replace or repair damaged parts. *Use genuine parts only. Non-authorised parts may be dangerous and will invalidate the warranty.*
- ☐ **WARNING!** Keep all guards and holding screws in place, tight and in good working order. Check regularly for damaged parts. A guard or any other part that is damaged must be repaired/replaced before the tool is next used.
- ✓ Locate polisher/sander in a suitable working area, keep area clean and tidy and free from unrelated materials. Ensure there is adequate lighting.
- ✓ Keep the polisher/sander clean for best and safest performance.
- ✓ Before each use check abrasive attachments for condition. If worn or damaged replace immediately.
- ✓ Ensure there are no flammable or combustible materials near the work area.
- ☐ **WARNING!** Wear approved eye safety protection, ear defenders and, if dust is generated, respiratory protection.
- ✓ Maintain correct balance and footing. Ensure the floor is not slippery and wear non-slip shoes.
- ✓ Secure non-stable work piece with a clamp, vice or other adequate holding device.
- ✓ Remove adjusting keys and wrenches from the machine and its vicinity before turning it on.
- ✓ Remove ill fitting clothing. Remove ties, watches, rings, and other loose jewellery, and contain and/ or tie back long hair.
- ✓ Keep children and unauthorised persons away from the working area.
- ✗ **DO NOT** use equipment for any purpose other than that for which it is designed.
- ✗ **DO NOT** operate the polisher/sander if any parts are damaged or missing as this may cause failure or possible personal injury.
- ☐ **WARNING! DO NOT** sand any materials containing asbestos.
- ✗ **DO NOT** switch the polisher/sander on whilst the head is in contact with the work piece and avoid unintentional starting.
- ✗ **DO NOT** get the polisher/sander wet or use in damp or wet locations or areas where there is condensation.
- ✗ **DO NOT** allow untrained persons to operate the polisher/sander.
- ✗ **DO NOT** operate the polisher/sander when you are tired, under the influence of alcohol, drugs or intoxicating medication.
- ✗ **DO NOT** use the polisher/sander where there are flammable liquids, solids or gases such as paint solvents, etc.
- ✗ **DO NOT** leave the polisher/sander operating unattended.
- ✗ **DO NOT** carry the polisher/sander with your finger on the power switch.
- ✗ **DO NOT** pull the cord to remove the plug from the power supply.
- ✓ Use a qualified person to lubricate and maintain the polisher/sander.
- ✓ When not in use unplug from the mains power supply and store in a safe, dry, childproof area.

### 1.3. LEAD PAINT WARNING!

**IMPORTANT!** Paint once contained lead as a traditional ingredient. Contact with the dust from the removal of such paint is toxic and must therefore be avoided. The following action must be taken before using machine as a sander:

- 1.3.1. User must determine potential hazard relating to age of paint to be removed. (Modern paints do not have lead content).
  - ▲ **DANGER!** Keep all persons and pets away from the working area. The following are particularly vulnerable to the effects of lead paint dust: Expectant women, babies and children.
- 1.3.2. We recommend personal protection by using the following safety items:
  - A) Paint Spray Respirator (Sealey ref. SSP1699)

B) PE Coated Hooded Coverall (Sealey ref. SSP266).

C) Latex Gloves (Sealey ref. SSP24).

- 1.3.3. Take adequate measures to contain paint dust, flakes and scrapings. Wear safety equipment, as in (3) above and thoroughly clean all areas when task is complete.
- 1.3.4. Ensure the paint waste is disposed of in sealed bags or containers according to local regulations.

## 2. INTRODUCTION



Ergonomic design with comfortable soft grip handle. Variable speed control from 600-3000rpm in 7-speed settings make this suitable for both sanding and polishing. Alloy bevel gear head with protective cover coupled to a composite motor housing. Soft start, constant speed motor provides longer lasting performance. Carbon brush caps and mesh filters for simple maintenance. Supplied with Ø180mm backing pad, polishing bonnet and over the top D handle.

## 3. SPECIFICATION

Model No:.....**MS925PS.V2**  
Free speed:.....600-3000rpm  
Motor Power:.....1400W  
Pad Size:.....Ø180mm  
Plug Type:.....3-Pin  
Weight:.....4kg  
Supply:.....230V  
Thread Size:.....M14 2mm  
Noise Power/Pressure: .....93/82dB(A)  
Vibration/Uncertainty:.....11.83/1.5m/s<sup>2</sup>  
Power Supply Cable Length:.....1.8m  
Fuse Rating:.....10A

## 4. ASSEMBLY

- ❑ **WARNING!** Ensure unit is not plugged into the electrical supply before attempting any assembly.
- 4.1. Attach the 'D' handle (fig.1). Note: there is a mounting hole on either side to suit the application and/or operator.
- 4.2. Fit the backing pad by screwing it onto the spindle, locking the spindle by use of the lock button (fig.1)  
**NOTE:** the spindle is fitted with a left-hand thread.
- 4.3. The backing pad will accept hook & loop abrasive discs.

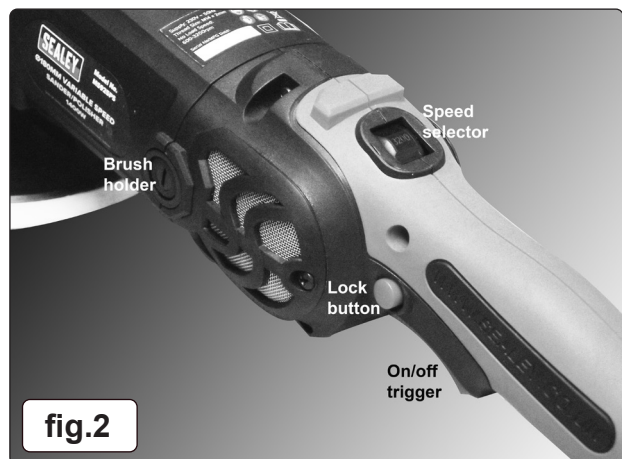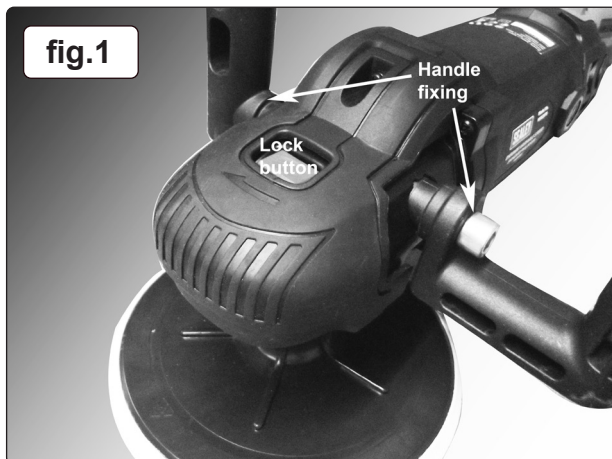

## 5. OPERATION

- ❑ **WARNING!** Ensure you read, understand and apply the safety instructions in Section 1. Ensure the power control switch is **NOT** locked on before plugging into the electrical supply.
- 5.1. To select the speed rotate the speed selector switch (fig.2) to the required setting.
- 5.2. To start the polisher: squeeze the trigger. If required, the trigger may be locked on by pressing the lock button. To release, squeeze the trigger again.
- ❑ **WARNING!** The high speed settings are intended for sanding. If used for polishing an excessive amount of surface material may be removed.  
**Note:** As the rubber support disc is flexible, when sanding it should not be used head on, but at an angle of approximately 10 to 20 degrees.  
Contact your Sealey Stockist for details of compound heads and lambswool bonnets.

## 6. MAINTENANCE

- ❑ **WARNING!** Before attempting any maintenance ensure the unit is unplugged from the mains power supply.
- 6.1. Keep the machine clean and dry. Clean with a damp cloth;  
× **DO NOT** use abrasive or solvent cleaners.
- 6.2. Clean regularly by blowing a jet of compressed air through side vents to ensure motor ventilation is kept clear.  
❑ **WARNING!** Wear approved safety eye protection and, if necessary, respiratory protection.  
**NOTE.** The following maintenance must only be carried out by a technically qualified person or an authorised Sealey service agent.
- 6.3. Check carbon brushes by removing each side brush holder (fig.2).
- 6.4. Check to see if the brushes are worn or cracked (fig.3). If so, the brushes must be replaced to avoid sparking and damage to the armature. Always change brushes as a pair. Use only genuine spare parts as these are specifically designed for the machine.

Failure to do so may be dangerous and will invalidate your warranty.

- 6.5. After each 500 hours of use replace the gear head grease to prevent gear wear and possible drive failure.

**❏ WARNING! – Risk of Hand Arm Vibration Injury.**

**This tool may cause Hand Arm Vibration Syndrome if its use is not managed adequately.**

This tool is subject to the vibration testing section of the Machinery Directive 2006/42/EC.

This tool is to be operated in accordance with these instructions.

**Measured vibration emission value (a): 11.83 m/s<sup>2</sup>**

**Uncertainty value (k): 1.5 m/s<sup>2</sup>**

*Please note that the application of the tool to a sole specialist task may produce a different average vibration emission. We recommend that a specific evaluation of the vibration emission is conducted prior to commencing with a specialist task.*

A health and safety assessment by the user (or employer) will need to be carried out to determine the suitable duration of use for each tool.

**NB:** Stated Vibration Emission values are type-test values and are intended to be typical.

Whilst in use, the actual value will vary considerably from and depend on many factors.

Such factors include; the operator, the task and the inserted tool or consumable.

**NB:** ensure that the length of leader hoses is sufficient to allow unrestricted use, as this also helps to reduce vibration.

*The state of maintenance of the tool itself is also an important factor, a poorly maintained tool will also increase the risk of Hand Arm Vibration Syndrome.*

**Health surveillance.**

We recommend a programme of health surveillance to detect early symptoms of vibration injury so that management procedures can be modified accordingly.

**Personal protective equipment.**

We are not aware of any personal protective equipment (PPE) that provides protection against vibration injury that may result from the uncontrolled use of this tool. We recommend a sufficient supply of clothing (including gloves) to enable the operator to remain warm and dry and maintain good blood circulation in fingers etc. Please note that the most effective protection is prevention, please refer to the Correct Use and Maintenance section in these instructions. Guidance relating to the management of hand arm vibration can be found on the HSC website [www.hse.gov.uk](http://www.hse.gov.uk) - Hand-Arm Vibration at Work.



**WEEE REGULATIONS**

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.



**ENVIRONMENT PROTECTION**

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

**Note:** It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice. Please note that other versions of this product are available. If you require documentation for alternative versions, please email or call our technical team on [technical@sealey.co.uk](mailto:technical@sealey.co.uk) or 01284 757505.

**Important:** No Liability is accepted for incorrect use of this product.

**Warranty:** Guarantee is 12 months from purchase date, proof of which is required for any claim.

**Jack Sealey Ltd t/a Sealey Group**, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk, IP32 7AR UK

**Jack Sealey (EU) Ltd t/a Sealey Group**, Farney Street, Carrickmacross, Co. Monaghan, A81 PK68 Ireland

**Tel:** 01284 757500 • **Email:** [sales@sealey.co.uk](mailto:sales@sealey.co.uk) • **Web:** [www.sealey.co.uk](http://www.sealey.co.uk)